



SO Flow-V

VARIABLE-SPEED FILTER PUMP



- W* Variable-speed filter pump
- W* Optimisation of filtration efficiency
- W* Intuitive and easy to use
- W* Also compatible in salt water
- W* Low maintenance due to a large pre-filter basket
- W* Self-priming




- W* Silence control: low vibration and very quiet
- W* Automatic pump with storage of the last operating modes
- W* Optimum Lifespan - Thanks to its integrated intelligent protection system
- W* Robust and reliable due to the quality of the materials used



SPECIFICATIONS

| PRODUCT | SFV 1 |
|-----------------------|--|
| Pre-defined speeds | Low 1500 rpm Average 2850 rpm High 3450 rpm |
| Rotation speed | 750 - 3450/25 rpm |
| Useful power | 1 CV 750 W |
| Rated current | 0.4 - 5.2 A |
| Consumption | Low 100-200 W Medium 300-600 W High 600-1200 W |
| Fitting diameter | ø50 mm |
| Type of motor | Permanent magnet synchronous motor |
| Body | Polypropylene and glass fibre |
| Bearing | Graphite and ceramic bearing |
| Motor shaft | STAINLESS STEEL AISI 420 |
| Motor body | Aluminium L-2521 |
| Drain plug | Yes |
| Closure of the lid | Quarter-turn closure |
| Flow at 8 mce | 17 m ³ /h |
| Acoustic power at 1 m | 52 ~ 65 dB |
| Power | 220-240V/50-60Hz |
| Unit size (l/L/h) | 621x238x330 mm |
| Box size (l/L/h) | 630x270x370 mm |
| Net weight | 10.5 kg |
| Total weight | 12 kg |
| Warranty | 3 years |

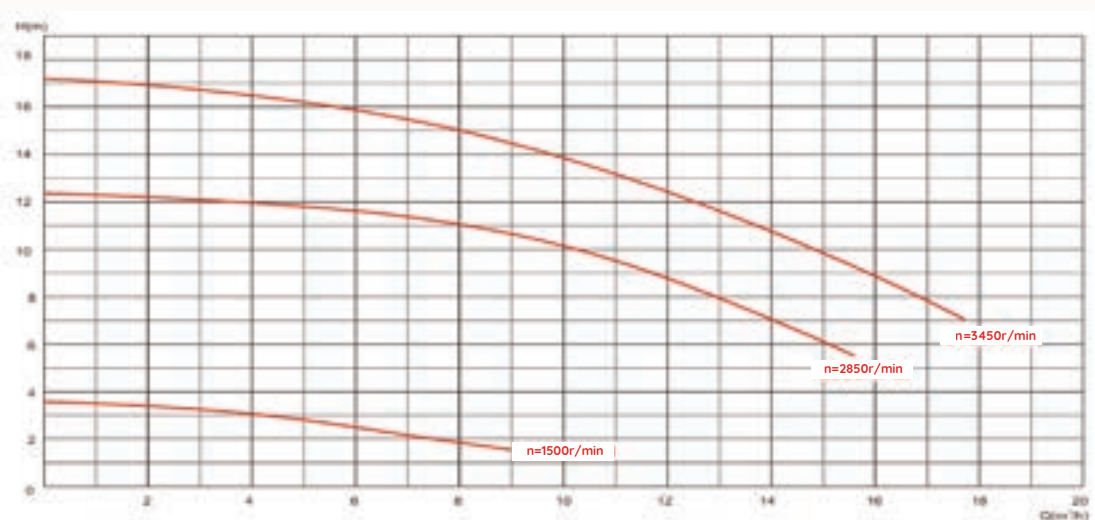

ACCESSOIRES

- Pre-filter basket (Volume: 1.9 Litres)
- Silent blocks
- Comes with its connecting cable

